

**Panel**  
**Dual Polarization**  
**Half-power Beam Width**  
**Fixed Electrical Downtilt**

1710–1880

X

33°

2°

**KATHREIN**



Antennen · Electronic

**XPol Panel 1710–1880 33° 22dBi 2°T**

Type No.	<b>741 623</b>	
Frequency range	1710 – 1880 MHz	
Polarization	+45°, –45°	
Gain	2 x 22 dBi	
Half-power beam width Copolar	+45° Horizontal: 33° Vertical: 5°	–45° Horizontal: 33° Vertical: 5°
Electrical tilt	2°, fixed	
Sidelobe suppression	above horizon for first sidelobe better or equal 14 dB below maximum gain	
Front-to-back ratio, copolar	> 30 dB	
Isolation	> 30 dB	
Impedance	50 Ω	
VSWR	< 1.5	
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)	
Max. power per input	200 W (at 50 °C ambient temperature)	



+45°/–45° Polarization

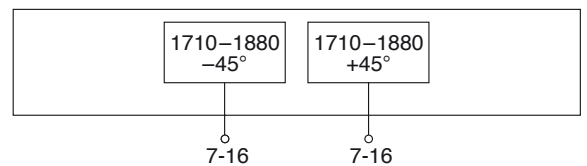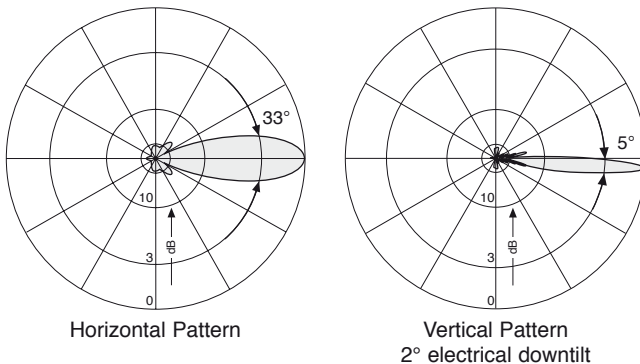

**Mechanical specifications**

Input	2 x 7-16 female
Connector position	Bottom
Weight	11 kg
Wind load	Frontal: 540 N (at 150 km/h) Lateral: 210 N (at 150 km/h) Rearside: 770 N (at 150 km/h)
Max. wind velocity	200 km/h
Packing size	2057 x 282 x 99 mm
Height/width/depth	1942 / 262 / 59 mm

936.1866/f Subject to alteration.

### Accessories (order separately)

Type No.	Description	Remarks	Material	Weight approx.	Units per antenna
738 546	1 clamp	Mast: 50 – 115 mm dia.	Hot-dip galvanized steel	1.0 kg	2
850 10002	1 clamp	Mast: 110 – 220 mm dia.	Hot-dip galvanized steel	2.7 kg	2
850 10003	1 clamp	Mast: 210 – 380 mm dia.	Hot-dip galvanized steel	4.8 kg	2
737 975	1 downtilt kit	Downtilt angle: 0° – 11°	Stainless steel	2.8 kg	1

Wall mounting: No additional mounting kit needed.

#### Material:

**Reflector screen and radiator:** Copper.

**Flat fiberglass radome:** The max. radome depth is only 59 mm. Fiberglass material guarantees optimum performance with regards to stability, stiffness, UV resistance and painting. The colour of the radome is grey.

**All screws and nuts:** Stainless steel.

#### Grounding:

The metal parts of the antenna including the mounting kit and the inner conductors are DC grounded.

#### Environmental conditions:

Kathrein cellular antennas are designed to operate under the environmental conditions as described in ETS 300 019-1-4 class 4.1 E.


The antennas exceed this standard with regard to the following items:

- Low temperature: –55 °C
- High temperature (dry): +60 °C

**Ice protection:** Due to the very sturdy antenna construction and the protection of the radiating system by the radome, the antenna remains operational even under icy conditions.

#### Environmental tests:

Kathrein antennas have passed environmental tests as recommended in ETS 300 019-2-4. The homogenous design of Kathrein's antenna families use identical modules and materials. Extensive tests have been performed on typical samples and modules.

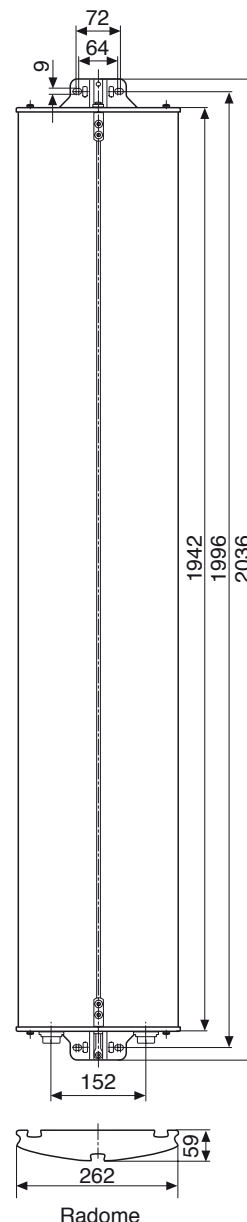

#### Please note:

**As a result of more stringent legal regulations and judgements regarding product liability, we are obliged to point out certain risks that may arise when products are used under extraordinary operating conditions.**

The mechanical design is based on the environmental conditions as stipulated in ETS 300 019-1-4, which includes the static mechanical load imposed on an antenna by wind at maximum velocity. Extraordinary operating conditions, such as heavy icing or exceptional dynamic stress (e.g. strain caused by oscillating support structures), may result in the breakage of an antenna or even cause it to fall to the ground. These facts must be considered during the site planning process.

**The installation team must be properly qualified and also be familiar with the relevant national safety regulations.**

**The details given in our data sheets have to be followed carefully when installing the antennas and accessories.**

**The limits for the coupling torque of RF-connectors, recommended by the connector manufacturers must be obeyed.**

**Any previous datasheet issues have now become invalid.**

