


# All Panels Accessories Azimuth Adjustment Tool

## Type No. 738 440

Precise azimuth adjustment for mast mounted antennas can easily be achieved by using the azimuth adjustment tool.

This tool is suitable to all types of Panels and Tri-Sector Pipe Antennas with a maximum width of 315 mm.

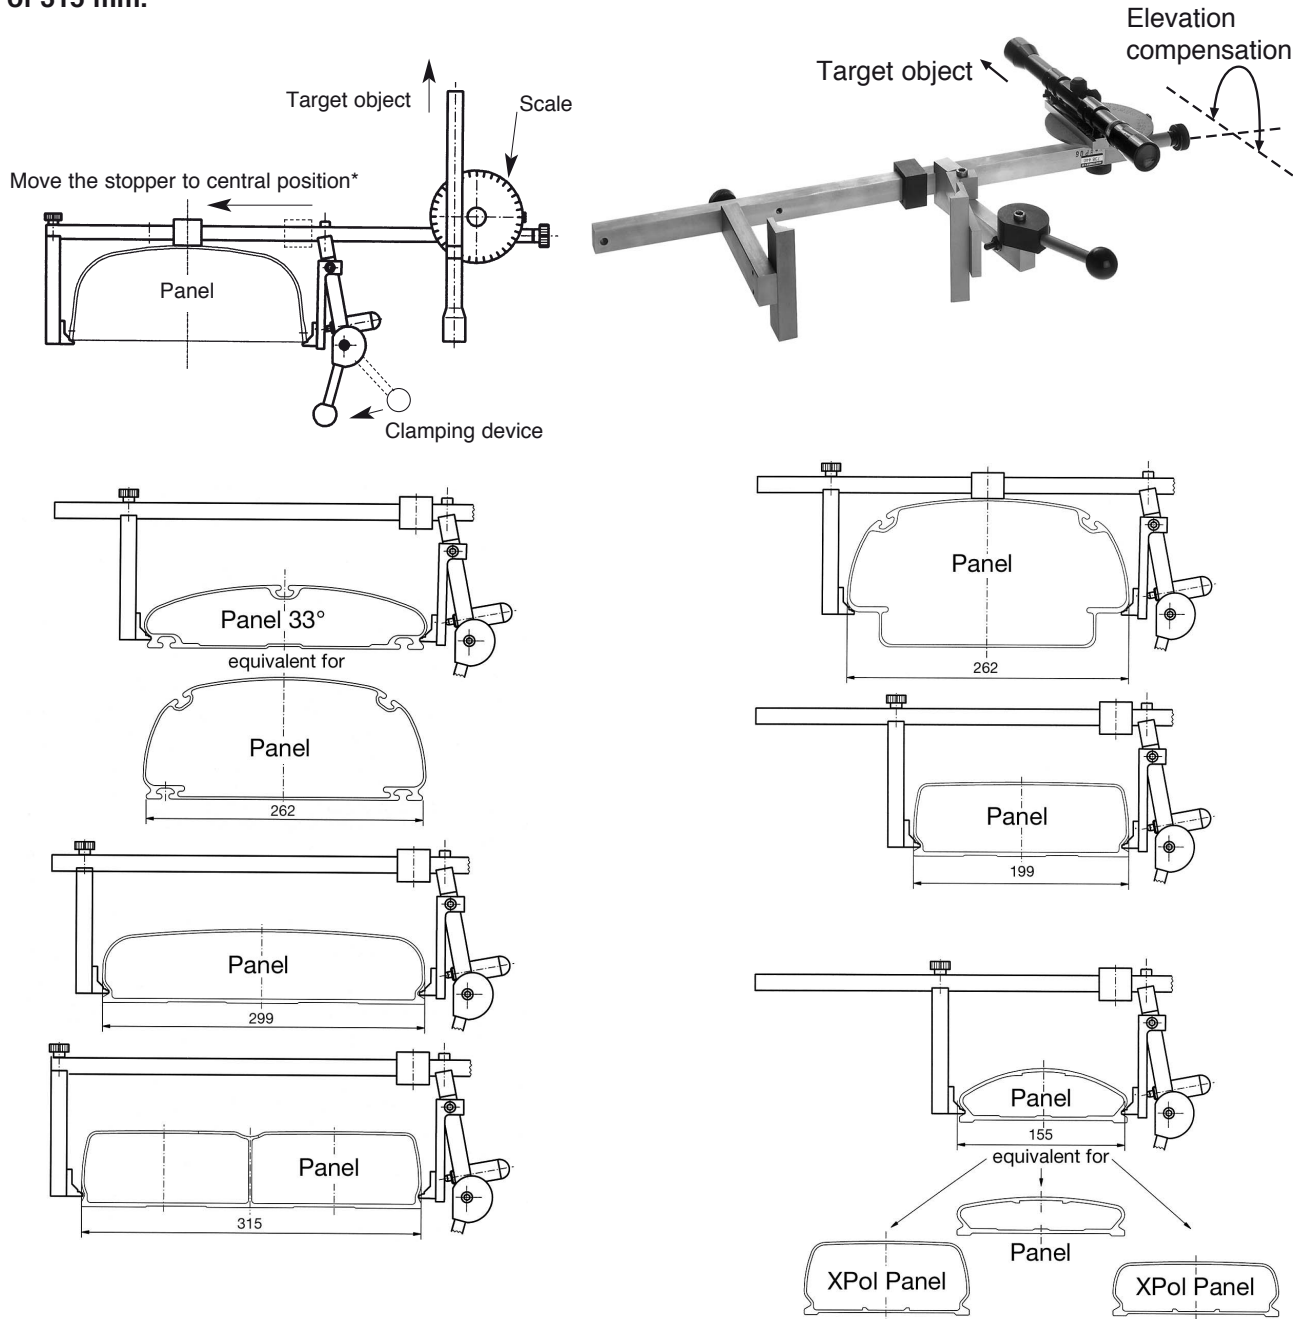

### Instruction:

- Use a map to work out the angle between the designed antenna azimuth and target (church, building, mountain peak).
- Set this angle on the scale of the adjustment tool.
- Place the adjustment tool onto the antenna and tighten the clamping device.
- Use the telescope to aim at the target object, if necessary, use elevation compensation.
- Then rotate the antenna until the target object appears in the telescope.

\* Observe the position of the stopper when fitting the azimuth adjustment tool.