


## Software and Channel list Update Guide UFS 650/UFS 651:


### Software update:

#### 1. Open NecTool on PC

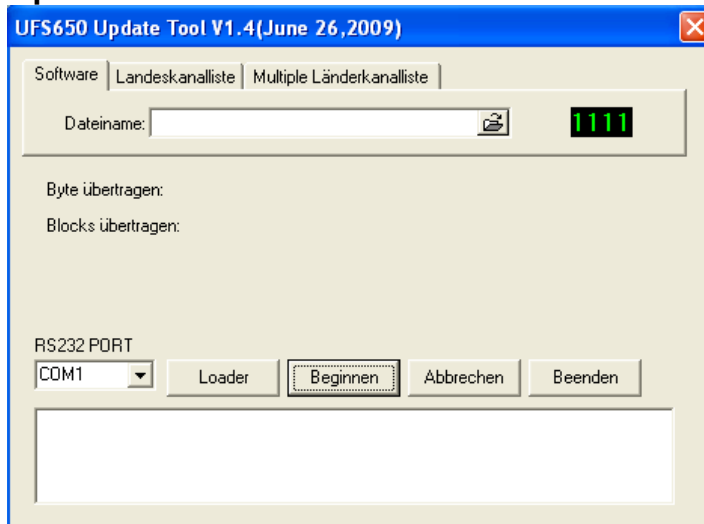

#### 2. Switch off receiver using mains switch


#### 3. Select the receiver software

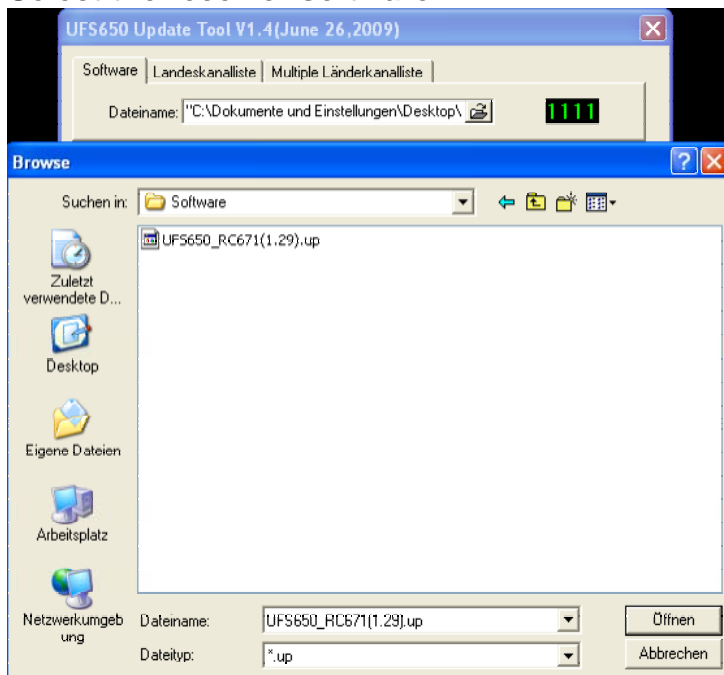

- after selecting the Software press on **"Loader"**
- on the receiver you will see **"----"** displayed
- press down once on the receiver's ,right' key – displayed will be **"1111"**
- then press on the receiver's ,left' key – displayed will be **"rec"**
- Press down on **"Start"**
- Wait until **"1111"** is displayed
- Start receiver anew
- Software updating is now finished

## Channel list update:


### 1. Open NecTool on the Pc

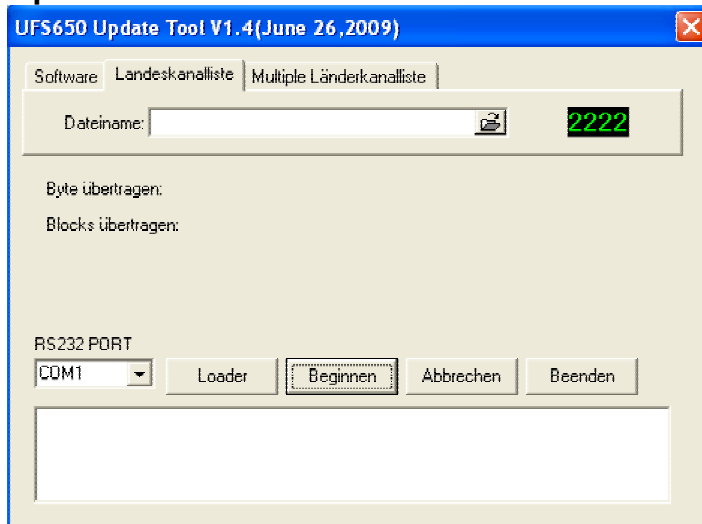

### 2. Select the feature „National channel list“

### 3. Switch off receiver using the mains switch


### 4. Select the channel list

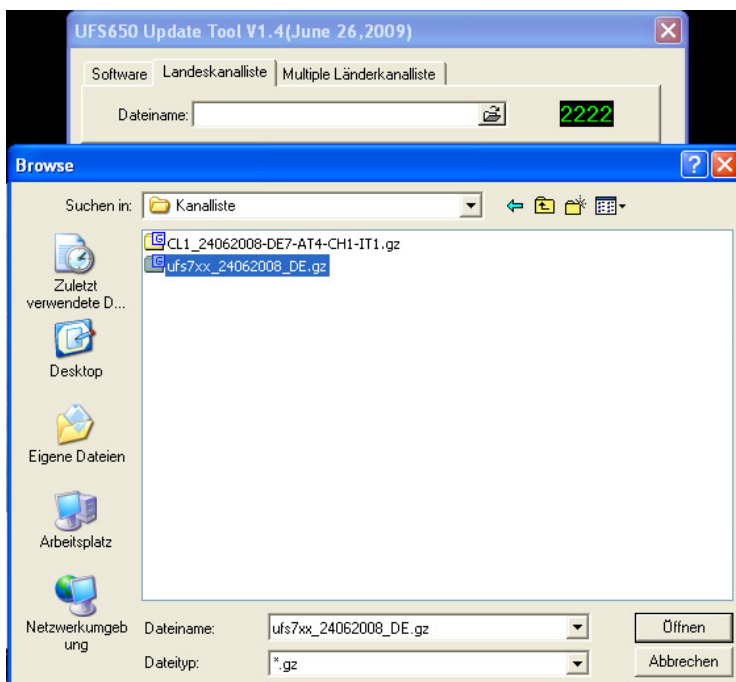

- after selecting the national channel list<sup>1</sup> press down on **"Loader"**
- displayed will be **"----"**
- press down twice on the receiver's ,right' key – displayed will be **"2222"**
- then press down once on the left key – displayed will be **"rec"**
- Press on **"Start"**
- Wait until **"2222"** is displayed again
- Start receiver anew

<sup>1</sup> A list of the UFS 710 can be downloaded from the Kathrein homepage as a national list!  
Then this must be converted into a „gz archive“ e.g. using 7-Zip or Total Commander

## 5. Carrying out a factory installation

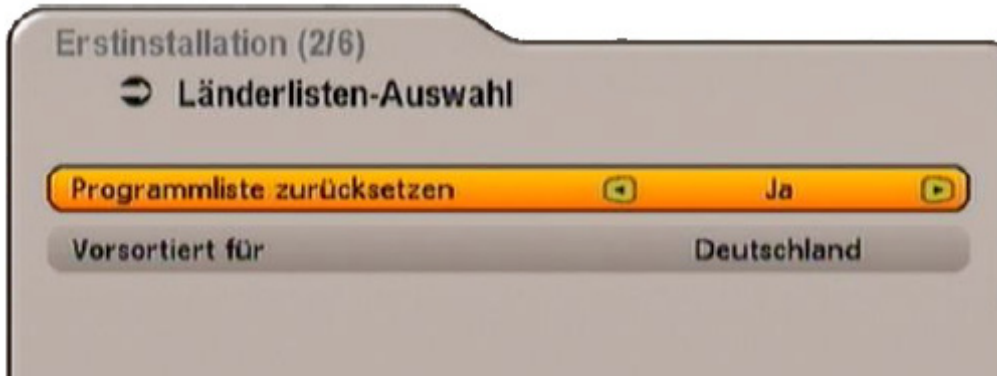

- If you select „No“ from this display, then the national list will be activated
- If you select „Yes“ from this display then the multiple channel list will be activated

**Note:** Your sorted channel list will not be saved if you carry out any of these 2 processes!